

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
EVERT M. BOSMA, FRANK VAN DAM AND FRANCISCUS J.M. THUSFor: A WIRE-BOUND TELECOMMUNICATION DEVICE AND A CIRCUIT FOR USE
SUCH A DEVICE**ENCLOSED ARE:**

- ☒ Appointment of Associates;
☒ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
☒ Preliminary Amendment;
☒ Specification (8 Pages of Specification, Claims, & Abstract);
☒ Declaration and Power of Attorney:
(2 Pages of a [] fully executed [X] unsigned Declaration);
☒ Drawing (3 sheets of [] informal [X] formal sheets);
☒ Certified copy of European application Serial No.97203329.4;
☒ Authorization Pursuant to 37 CFR §1.136(a)(3)
[] Other: ;
[] Assignment to .

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - \$790.00
Total Claims	10 - 20 =	0	X \$22 =	0.00
Independent Claims	2 - 3 =	0	X \$82 =	0.00
Multiple Dependent Claims, if any			\$270 =	0.00
TOTAL FILING FEE				= \$790.00

Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

[] Amend the specification by inserting before the first line as a centered heading --Cross Reference to Related Applications--; and insert below that as a new paragraph --This is a continuation-in-part of application Serial No. , filed , which is herein incorporated by reference--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL215004168US
Date of Deposit October 30, 1998

I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Natale A. Manzo
Typed Name

Natale A. Manzo
Signature

Dicran Halajian
Dicran Halajian, Reg. 39,703
Attorney
(914) 333-9607
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591

S:\MK\MISCELNS\MB30MKA0.MAO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

EVERT M. BOSMA ET AL.

PHN 16,611

Serial No.

Filed: CONCURRENTLY

Title: A WIRE-BOUND TELECOMMUNICATION DEVICE AND A CIRCUIT
FOR USE IN SUCH A DEVICE

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to calculation of the filing fee and
examination, please amend the above-identified application
as follows:

IN THE CLAIMS

Please amend the following Claim:


Claim 4, line 1, change "claims 1, 2 or 3," to
--claim 1--.

REMARKS

The claim has been amended to delete multiple dependencies.

The within amendment is limited to the equivalent of cancellation of claims, and pursuant to MPEP §506, should be entered prior to calculation of the filing fee.

Respectfully submitted,

By 
Dicran Halajian, Reg. 39,703
Attorney
(914) 333-9607
October 30, 1998

"A wire-bound telecommunication device and a circuit for use in such a device"

The present invention relates to a wire-bound telecommunication device comprising terminals for coupling the device to a subscriber line of a telecommunication network, a transmission circuit, and a signal energy detecting arrangement.

5 The present invention further relates to a circuit for use in a wire-bound telecommunication device.

10 A wire-bound telecommunication device of the above kind is known from the US Patent No. 5,519,774. In this US patent, the signal energy of an alerting signal is detected on the basis of a filtered signal. For filtering tone comprised in the alerting signal narrow frequency band filters are used. Such filters are complex and use a lot of chip area. Besides, no other use of the energy detector can be made because it can only measure the energy in a pre-filtered frequency band.

15 It is an object of the present invention to provide a wire-bound telecommunication device comprising a signal energy detection arrangement which is simple and low cost in terms of chip area, and which can be used for other purposes than energy determination of tones.

20 To this end the wire-bound telecommunication device is characterised in that the signal energy detecting arrangement comprises means for determining a time-domain signal representing the signal energy of a signal on the subscriber line in a predetermined time interval. The present invention is based upon the insight that by not limiting the energy detection to small frequency bands of an input signal, the complete frequency spectrum can
25 be monitored. Herewith, all kinds of signals can be detected and/or monitored. Preferably, the signal protocol should be known so that deterministic signal energy detection can be applied for predetermined signals in the signal protocol.

Embodiments of a wire-bound telecommunications device according to the present invention are claimed in the dependent claims. Signal energy can be determined

cyclically or can be triggered by a trigger pulse generated at predetermined points of time. In one embodiment, the end of a tone alerting signal is detected and thereafter an FSK-detector (Frequency Shift Keying) for detecting a succeeding caller identification signal is initiated. At the same time, an AC-line impedance is switched parallel to the subscriber line. Because the
5 signal energy detecting arrangement also 'sees' the FSK signal, power drops in such a signal can be easily detected. This is based upon the insight that the frequency spectrum of power drops is not confined to predetermined frequency bands and that thus filtering can not be applied for isolating power drops in the signal. If such a power drop lasts for too long a period, the wire-bound telecommunication device's idle state impedance is restored. In
10 another embodiment, the signal energy detecting device can be used for monitoring subscriber line load variations. The signal energy determination according to the present invention is thus extremely simple and is flexible in use for detecting and monitoring all kinds of signals and for initiating control functions. Signal deviations are 'seen' without being limited in frequency. If the signal protocol is modified, e.g., by including an additional
15 signal, the signal energy determination can easily be adapted so that also this additional signal is monitored.

The present invention will now be described, by way of example, with
20 reference to the accompanying drawings, wherein

Fig. 1 schematically shows a wire-bound telecommunication device according to the present invention,

Fig. 2 shows a first embodiment of a signal energy detector according to the present invention,

25 Fig. 3 shows a second embodiment of an signal energy detector according to the present invention, and

Fig. 4 shows signals in a wire-bound telecommunication device according to the present invention.

Throughout the figures the same reference numerals are used for the same
30 features.

Fig. 1 schematically shows a wire-bound telecommunication device 1 according to the present invention. The device 1 comprises terminals 2 and 3 for coupling to

a subscriber line 4 of a telecommunication network. Such a network can be an analog public switched telephone network, or any other suitable network, preferably offering a so-called caller identification service. With such a service, a subscriber gets information about the caller's IDentity such as the caller's telephone number and name. Upon reception of

5 caller_ID information such information can be displayed on a display 5 comprised in the device 1. In a caller_ID signal protocol, first a so-called tone alerting signal TAS is received upon which the device 1 is prepared to receive the actual caller_ID information, e.g., in the form of FSK (Frequency Shift Keying) data (see Fig. 4). For starting the preparation phase, the end of the tone alerting signal TAS must be detected. In a British Telecom system, the

10 end the TAS is signalled by two tones having the respective frequencies $2130 \text{ Hz} \pm 1.1\%$ and $2750 \text{ Hz} \pm 1.1\%$. In a US Bellcore telecom system, the end of TAS tones are $2130 \text{ Hz} \pm 0.5\%$ and $2750 \text{ Hz} \pm 0.5\%$. It can thus readily been seen that a wire-bound telecommunication device designed for the US market applying narrow-band tone filtering as of US 5,519,774 is not suitable for the British market. A costly re-design is needed because

15 such a US-phone would simply not detect BT end of TAS tones. This is due to the fact that the tone tolerance in the BT system is greater than in the Bellcore system for which the narrow band filters were designed. The present invention does not show such a big disadvantage. The wire-bound telecommunication device 1 further comprises a transmission circuit 6 coupled to the terminals 2 and 3 via a rectifier bridge 7 and a cradle switch 8, a

20 programmed microcontroller 9 comprising ROM and RAM memory, an energy detecting arrangement 10, and an FSK detector 11. The transmission circuit can be an IC type TEA106x or TEA111x, being readily available onto the market. The energy detecting arrangement 10 and the FSK detector 11 are coupled parallel to the subscriber line 4. Further shown is line-current interrupting transistor 12 for allowing pulse dialling. Instead of pulse

25 dialling tone dialling can be applied. Then, via the transmission circuit 6 dialling tones are put on the subscriber line 4. For processing a caller's ringing signal on the subscriber line 4, the device 1 comprises a DC-decoupled bell 13. AC-coupling is achieved by a capacitor 14 in series with the bell 13. After reception of the caller_ID information, an AC line terminating impedance 15 is switched parallel to the line 4.

30 Fig. 2 shows a first embodiment of the signal energy detector 10 according to the present invention. In this analog embodiment, the detector 10 comprises a comparator 20 for comparing a signal IN on the subscriber line at a terminal 21 with an amplitude reference signal AREF at a terminal 22. If the signal IN exceeds the reference signal AREF, at an output 23 of the comparator 20 a signal state transition occurs,

practically resulting in a sequence of non-equidistant pulses of an unequal duration. These output pulses are fed to an integrator 24 which integrates the pulses over a predetermined interval T, e.g., 8 msec. Thereafter the integrator is reset and integration starts again. At an output 25 of the integrator 24 a time-domain signal IIN is thus available representing the signal energy of a signal on the subscriber line 4 in a predetermined interval T. The signal IIN is compared with an energy reference signal EREF by a comparator 26. At an output 27 of the signal energy detector 10 a control signal LLB, a low-level bit, is available. The low-level bit can be used to detect the end of TAS tones, to detect power drops in the FSK signal, to monitor subscriber line load variations, or for any other suitable use. In the sequel use of the low level bit LLB for end of TAS detection and FSK signal power drop detection will be described in more detail.

Fig. 3 shows a second embodiment of the signal energy detector 10 according to the present invention. In this digital embodiment, the detector 10 comprises an analog-to-digital converter 30, a low-level bit comparator/counter 31, and a caller_ID register 32. Basically, the same function is performed as in the analog embodiment of the detector 10. The comparator/counter 31 comprises a comparator 33 functioning as an amplitude detector and a counter 34 functioning as a presetable counter. The amplitude detector provides pulses as described in regard of Fig. 2 and the LLB, a counter overflow bit, indicates whether the average pulse energy and herewith the average of the signal IN was above or below a given energy level. In the example given a bit value "0" represents a relatively high energy level and a bit value "1" represents a relatively low energy level. Herewith, because detecting is not limited to a narrow predetermined frequency band, arbitrary tones can be detected and also power drops in a signal. If the signal protocol changes, e.g., because an additional pulse is included, the microcontroller 9 can easily be reprogrammed to also detect such an additional tone. Further shown in Fig. 3 is a data bus for coupling of the detector 10 to the microcontroller 9.

Fig. 4 shows the signals TAS and FSK in the input signal IN on the terminals 2 and 3 of the wire-bound telecommunication device 1 according to the present invention, and the low-level bit LLB at the output 27 or in the register 32 of the detector 10. Further shown is a so-called DC-wetting pulse DCW. The signals TAS and FSK are included in a caller_ID signal protocol which is assumed to be known at the programming stage of the wire-bound telecommunication device 1. For supporting several caller_ID protocols, a switch (not shown) could be provided at the bottom of the device 1. At different positions of the switch imprinted indications could be given to indicate predetermined protocols. The position

of such a switch could be detected by the microcontroller 9 so as to distinguish detection protocols pre-loaded in the microcontroller 9. The subscriber could then simply adjust the device 1 to various protocols. Because the DC-wetting pulse DCW must be available at a given time after the signal TAS, e.g., after 20 ± 5 msec, the end of TAS must be detected. In

5 the example given, the TAS tone is applied to the line by the exchange in the network more than 110 msec after line reversal which is detected by the caller_ID IC (Integrated Circuit) switched parallel to the transmission IC 6. During the occurrence of the signal TAS, in a predetermined time interval, e.g., 8 msec, the energy on the subscriber line 4 is above the energy reference level EREF. The measurement can be done cyclically or can be triggered

10 each time a trigger pulse is received from the microcontroller 9. Measurement can be started after line reversal detection or upon detection of a ringing signal. For detecting a valid signal TAS, during a time interval having a length between 88 msec and 110 msec, the low-level bit LLB should remain "0". This time interval is fixed for a given signal protocol, e.g., the BT protocol. For this reason, energy detection can be applied for determining the presence of

15 the signal TAS. Because the energy reference EREF is a number in a register it can easily be modified by the programmed microcontroller 9. After a valid TAS, the DC-wetting pulse DCW is generated, 20 ± 5 msec after the end of TAS. FSK-data comprising the caller_ID information is put on the subscriber line more than 45 msec after the end of TAS. The DC-wetting pulse DCW is sent to the network for acknowledging the reception of a valid TAS

20 and for preparing the device 1, notably the FSK detector 11, for the reception of data. In the example given such data are FSK caller_ID data. Advantageously, the detector 10 can also be used for detecting power drops in the signal FSK. If such a power drop would last too long, no correct reception of caller_ID information is achieved. In such a case, the idle state impedance is restored within 150 msec. Typically, a power drop lasting more than 40 msec

25 is interpreted as receiving invalid caller_ID data. Power drop is detected by the microcontroller 9 by reading the low-level bit LLB while knowing that the signal FSK is present more than 45 msec after the end of TAS. Because of this a priori known signal timing, signals can be distinguished, in the given example the signals TAS and FSK. In Fig. 4, below the signal FSK, the low-level bit sequence "0000" indicates that there was no power

30 drop and the low-level bit sequence "0100" indicates there actually was a power drop.

In view of the foregoing it will be evident to a person skilled in the art that various modifications may be made within the spirit and the scope of the present invention as hereinafter defined by the appended claims and that the present invention is thus not limited to the examples provided.

CLAIMS:

1. A wire-bound telecommunication device comprising terminals for coupling the device to a subscriber line of a telecommunication network, a transmission circuit, and a signal energy detecting arrangement, characterised in that the signal energy detecting arrangement comprises means for determining a time-domain signal representing the signal energy of a signal on the subscriber line in a predetermined time interval.
2. A wire-bound telecommunication device as claimed in claim 1, wherein the signal energy is determined cyclically.
3. A wire-bound telecommunication device as claimed in claim 1, wherein the signal energy determination is initiated by a trigger pulse.
4. A wire-bound telecommunication device as claimed in claims 1, 2 or 3, wherein the telecommunication device operates according to a given signal protocol, the signal energy being determined during at least one predetermined expected signal interval.
5. A wire-bound telecommunication device as claimed in claim 4, wherein the signal protocol is a caller identification signal protocol and the expected signal interval comprises a tone alerting signal.
6. A wire-bound telecommunication device as claimed in claim 5, wherein the signal energy determination is continued until a further expected signal interval comprising a caller identification signal.
7. A wire-bound telecommunication device as claimed in claim 6, wherein a caller identification signal detector is initiated by an initiating pulse which is generated a predetermined time after the detection of the tone alerting.
8. A wire-bound telecommunication device as claimed in claim 7, wherein the initiation pulse controls switching of an impedance parallel to the subscriber line.
9. A wire-bound telecommunication device as claimed in claim 1, wherein the energy determination is used for monitoring subscriber line load variations.
10. A circuit for use in a wire-bound telecommunication device comprising terminals for coupling the device to a subscriber line of a telecommunication network and a transmission circuit, the circuit comprising a signal energy detecting arrangement, characterised in that the signal energy detecting arrangement comprises means for

[illegible]

ABSTRACT:

"A wire-bound telecommunication device and a circuit for use in such a device"

In known telephone subscriber end stations a caller_ID IC detects a tone alerting signal TAS alerting that successive caller_ID information can be received for displaying on a display of the phone. The known station applies narrow frequency band filters to detect tones indicating the end of TAS. Such a detection is not flexible as it can
5 only be used for a specific caller_ID signal protocol.

A flexible detector is proposed which can easily be adapted to widely varying protocols and which can also be used for other purposes such as the detection of power drops in an FSK signal. The detector comprises means for determining a time-domain signal representing the signal energy of a signal on the subscriber line in a predetermined
10 time interval.

Fig. 3.

SECRET

[illegible]

Atty. Docket

PHN 16,611

Group Art Unit

Examiner:


APPOINTMENT OF ASSOCIATES

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:

(Registration No. 39,703)

(Registration No. 26,236)

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE
LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED
ATTORNEY OF RECORD.


 Jack E. Haken, Reg. 26,902
 Attorney of Record

S:\MK\MISCELNS\MB30MKE0.MA0

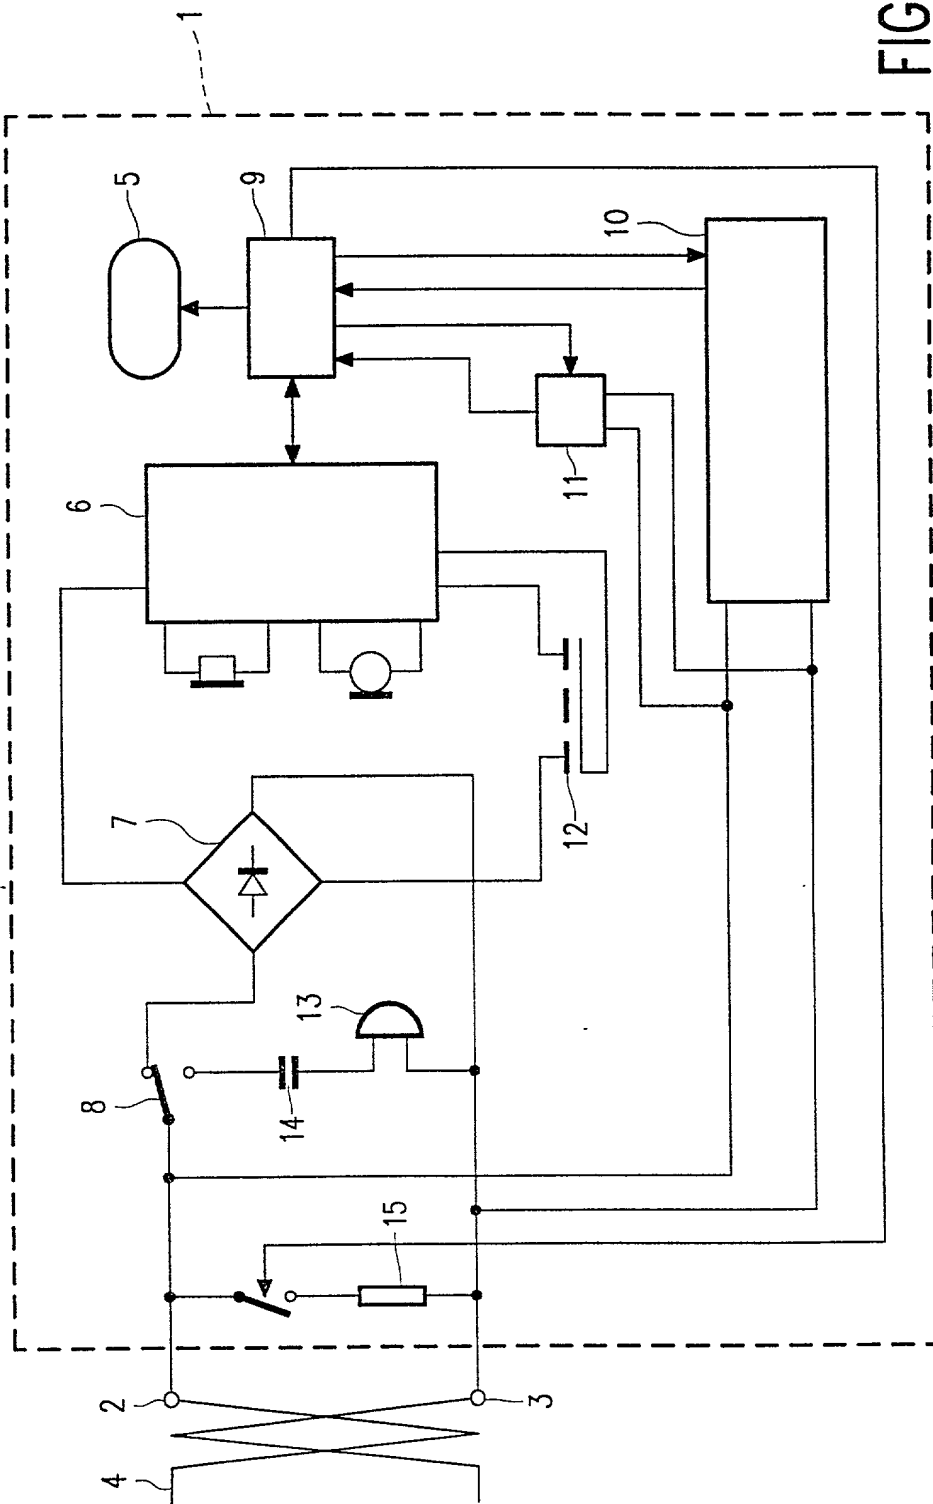


FIG. 1

2/3

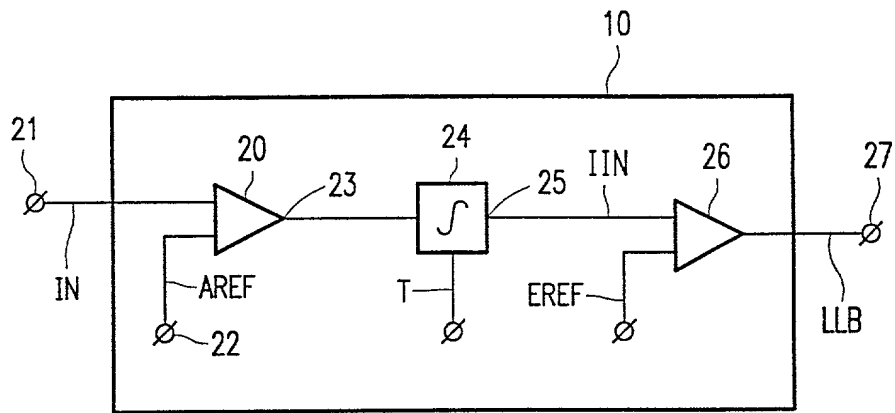


FIG. 2

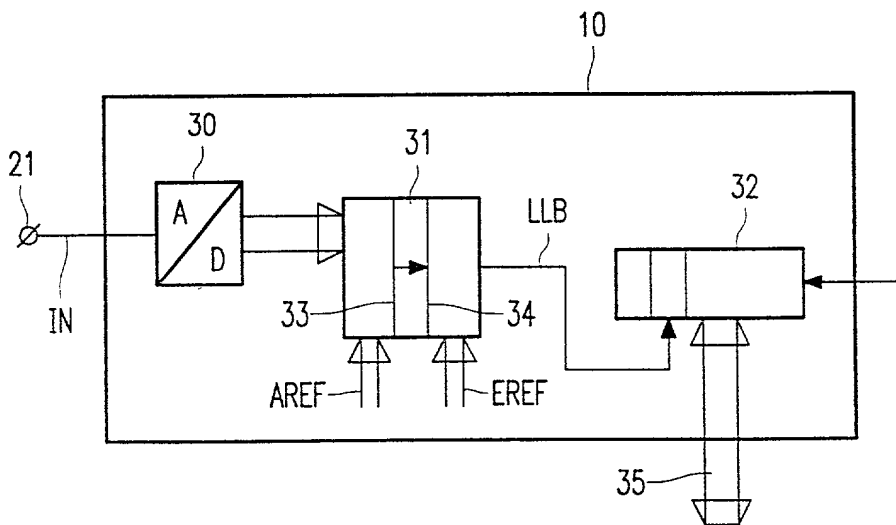


FIG. 3

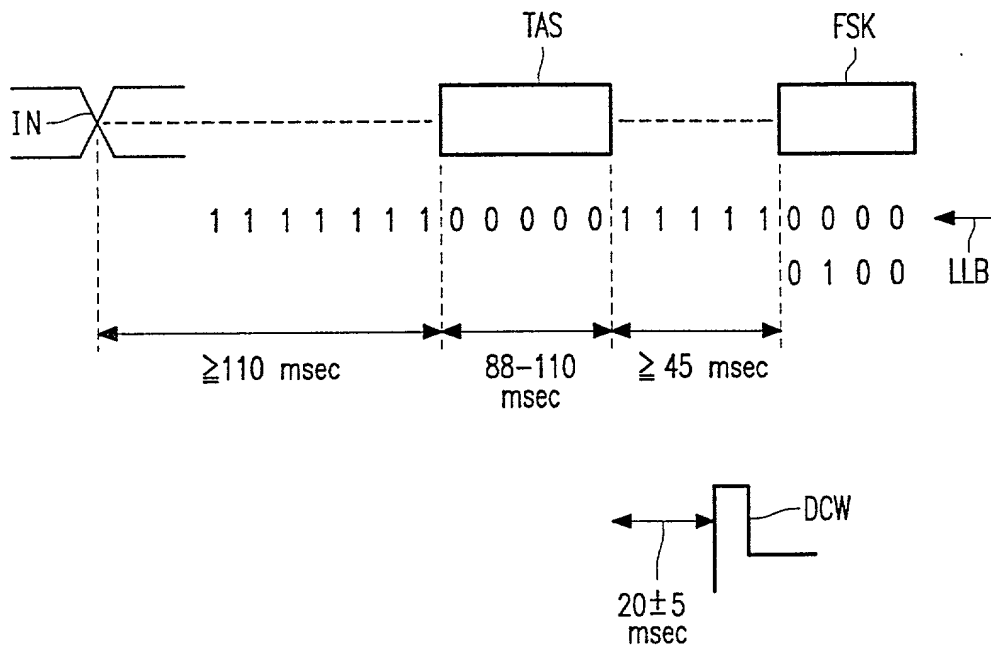


FIG. 4

DECLARATION and POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.:
PHN 16.611

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
"A wire-bound telecommunication device and a circuit for use in such a device"
the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APP.NUMBER	DATE OF FILING (DATE,MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Europe	97203329.4	31 October 1997	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677

Jack E. Haken, Reg. No. 26,902

SEND CORRESPONDENCE TO: Corporate Patent Counsel; U.S. Philips Corporation; 580 White Plains Road; Tarrytown, NY 10591	DIRECT TELEPHONE CALLS TO: (name and telephone No.) (914) 332-0222
--	--

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name BOSMA	First Name Evert	Middle Name M.	
Residence & Citizenship	City Eindhoven	State or Foreign Country The Netherlands	Country of Citizenship The Netherlands	
Post Office Address	Street Prof. Holstlaan 6	City 5656 AA Eindhoven	State or Country The Netherlands	Zip Code
Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name VAN DAM	First Name Frank	Middle Name	
Residence & Citizenship	City Adliswil	State or Foreign Country Switzerland	Country of Citizenship The Netherlands	
Post Office Address	Street Soodstrasse 32	City 8134 Adliswil	State or Country Switzerland	Zip Code

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name THUS	First Name Franciscus	Middle Name J.M.	
Residence & Citizenship	City Eindhoven	State of Foreign Country The Netherlands	Country of Citizenship The Netherlands	
Post Office Address	Street Prof. Holstlaan 6	City 5656 AA Eindhoven	State or Country The Netherlands	Zip Code

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State of Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State or Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State of Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State or Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State or Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State or Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name	First Name	Middle Name	
Post Office Address	City	State of Foreign Country	Country of Citizenship	
Residence & Citizenship	Street	City	State or Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of Inventor	Last Name	First Name	Middle Name	
Post Office Address	City	State of Foreign Country	Country of Citizenship	
Residence & Citizenship	Street	City	State or Country	Zip Code